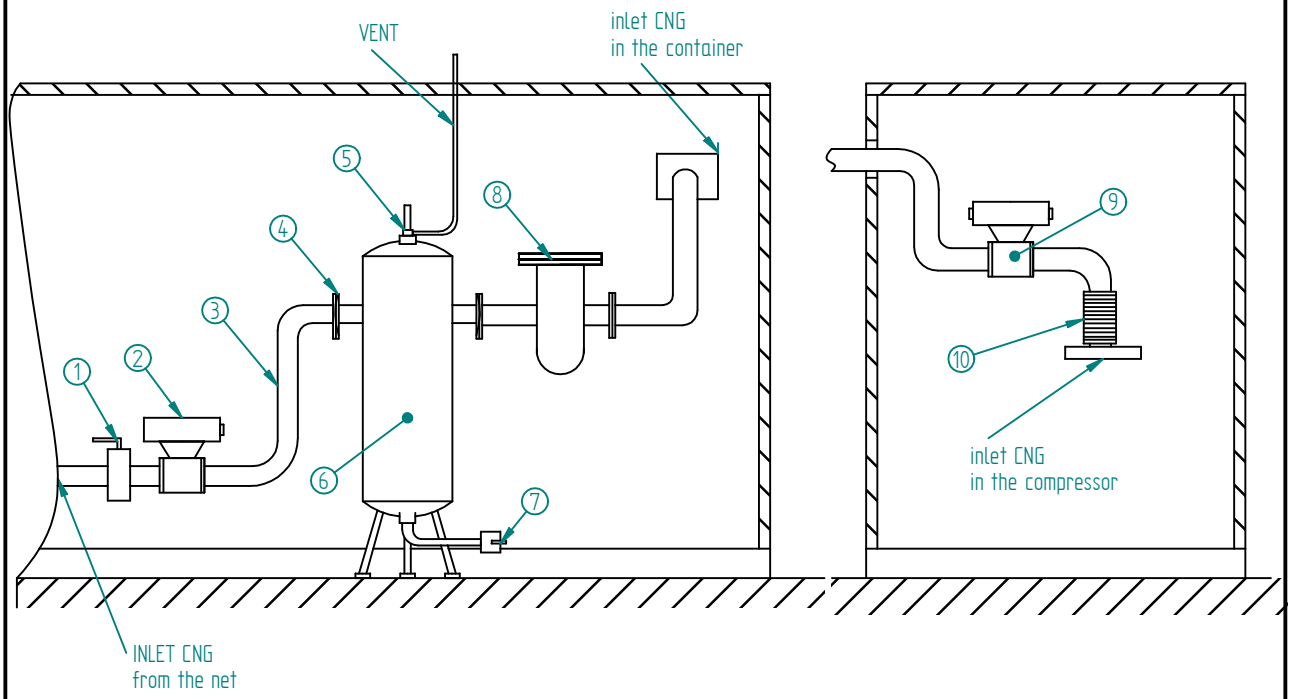

1. hand ball valve 3”
2. ball valve with pneumatic actuator 3”
3. pipe 3”
4. junction flange
5. safety valve with connection ¾” M and 1” F (calibrated 15 bar) + connection pipe to vent
6. damping capacity condensate recovering (500 lt)
7. ball valve ½” for condensate purging
8. Filter F 25 mm 3" and contingent drying group
9. ball valve with pneumatic actuator 3”
10. dilation joint

E' vietato consegnare a terzi o riprodurre questo documento. Utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione. Ogni infrazione comporta il risarcimento dei danni subiti. Sono riservati tutti i diritti derivanti dalla concessione di brevetti per invenzioni, di modelli industriali di utilità e di disegni o modelli. (UNI ISO 16016)

Disegno n°	Codice :	Descrizione : **INLET GAS LINE LAYOUT W160 009**

M.T.M. s.r.l.
SOCIETA' UNIPERSONALE
Via La Morra 1 - 12062 - Cherasco (Cn), Italy
Tel. +39 0172 48681
Fax +39 0172 593113
Fax +39 0172 488237
http://www.brc.it
e-mail:r&s@brc.it

File:

TOLLERANZE SECONDO ISO 2768

DA-A	CLASSE f	m	c
0.5-3	±0.05	±0.1	±0.2
3.01-6	±0.05	±0.1	±0.3
6.01-30	±0.1	±0.2	±0.5
30.01-120	±0.15	±0.3	±0.8
120.01-400	±0.2	±0.5	±1.2

Sistema :

REV.	DATA	MODIFICHE	FIRMA

Disegnatore : M.Galletta	Data : 03/11/2006	Firma :	Materiale :
Verificatore :	Data :	Firma :	Stato :
Approvatore :	Data :	Firma :	Tratt. sup. :
Scala :	Formato : A4	Foglio: / Durezza :	Tratt. term. :