


EXTERNAL CONNECTION
SMOOTH

EXTERNAL CONNECTION
SMOOTH

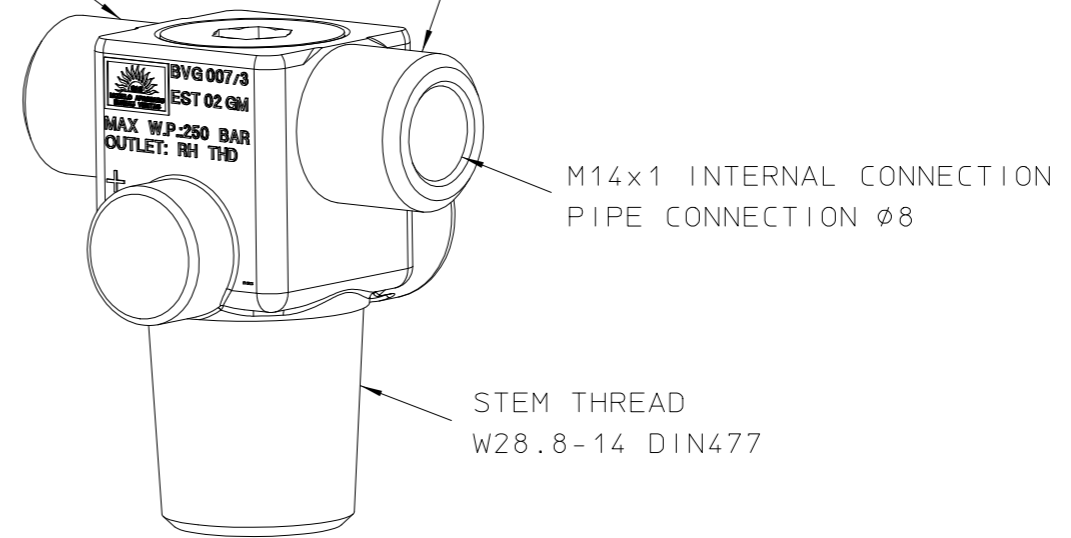

HOMOLOGATION: DGM ITALIA APPROVAL
WORKING TEMPERATURE: -40/+85°C
WORKING PRESSURE: MAX 260 bar
EXTERNAL CONNECTION: SMOOTH
INTERNAL CONNECTION: FEMALE M14x1
WEIGHT: 564g
PIPE CONNECTION: Ø8