



**CONCRETE BED : high view**

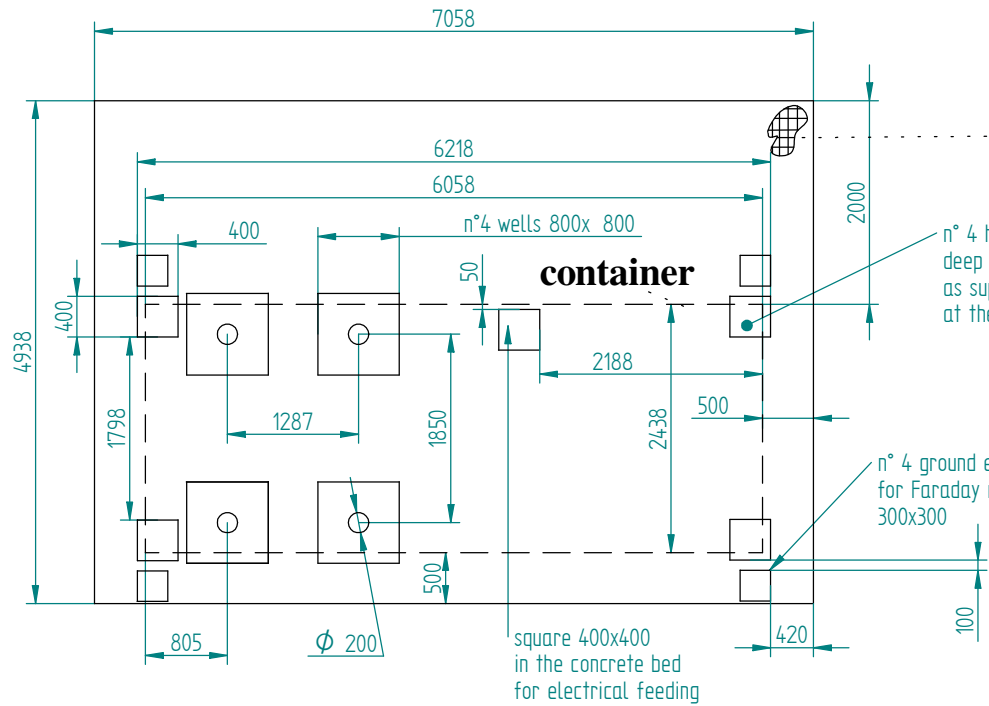

**dimension[mm]**


**CONCRETE BED SECTION**

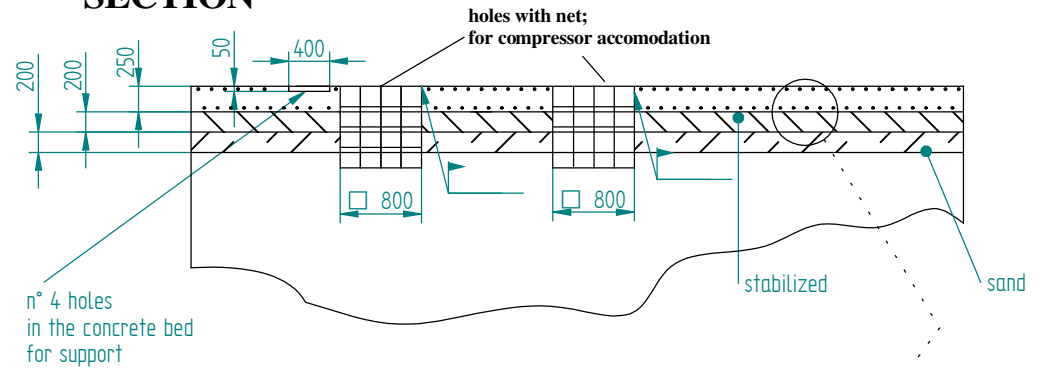

it is necessary to weld the net inside the the 4 holes (for the copressor feet) to the double net 15x15

double net f 8, 15x15 cm (one upper - one downster)

n° 4 holes 400x400 deep 50 mm in the concrete bed as support at the corners of the container

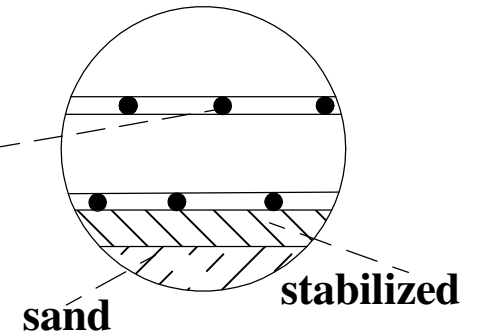

**Material: concrete Rck=250**  
**Steel Feb 44k Sigma amm=1600kg/cmq**

E' vietato consegnare a terzi o riprodurre questo documento. Utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione. Ogni infrazione comporta il risarcimento dei danni subiti. Sono riservati tutti i diritti derivanti dalla concessione di brevetti per invenzioni, di modelli industriali di utilità e di disegni o modelli. (UNI ISO 16016)

**M.T.M. s.r.l.**  
SOCIETA' UNIPERSONALE  
Via La Morra 1 - 12062 - Cherasco (Cn), Italy  
Tel. +39 0172 48681  
Fax +39 0172 593113  
http://www.brc.it  
e-mail:r&s@brc.it



REV.	DATA	MODIFICHE		FIRMA
Item n°:	0360809	Concrete bed W160-036		
Commissa/Job :		W160-036 EKO TRANS LTD		
Disegnatore :	M.Sartirano	Data :	21/06/07	Firma :
Verificatore :	M.Galletta	Data :	22/06/07	Firma :
Approvatore :	P.Abellonio	Data :	22/06/07	Firma :
Formato :	A3			Tavola/Sheet: 1/1